


# SONANCE

## SURFACE-MOUNT SERIES

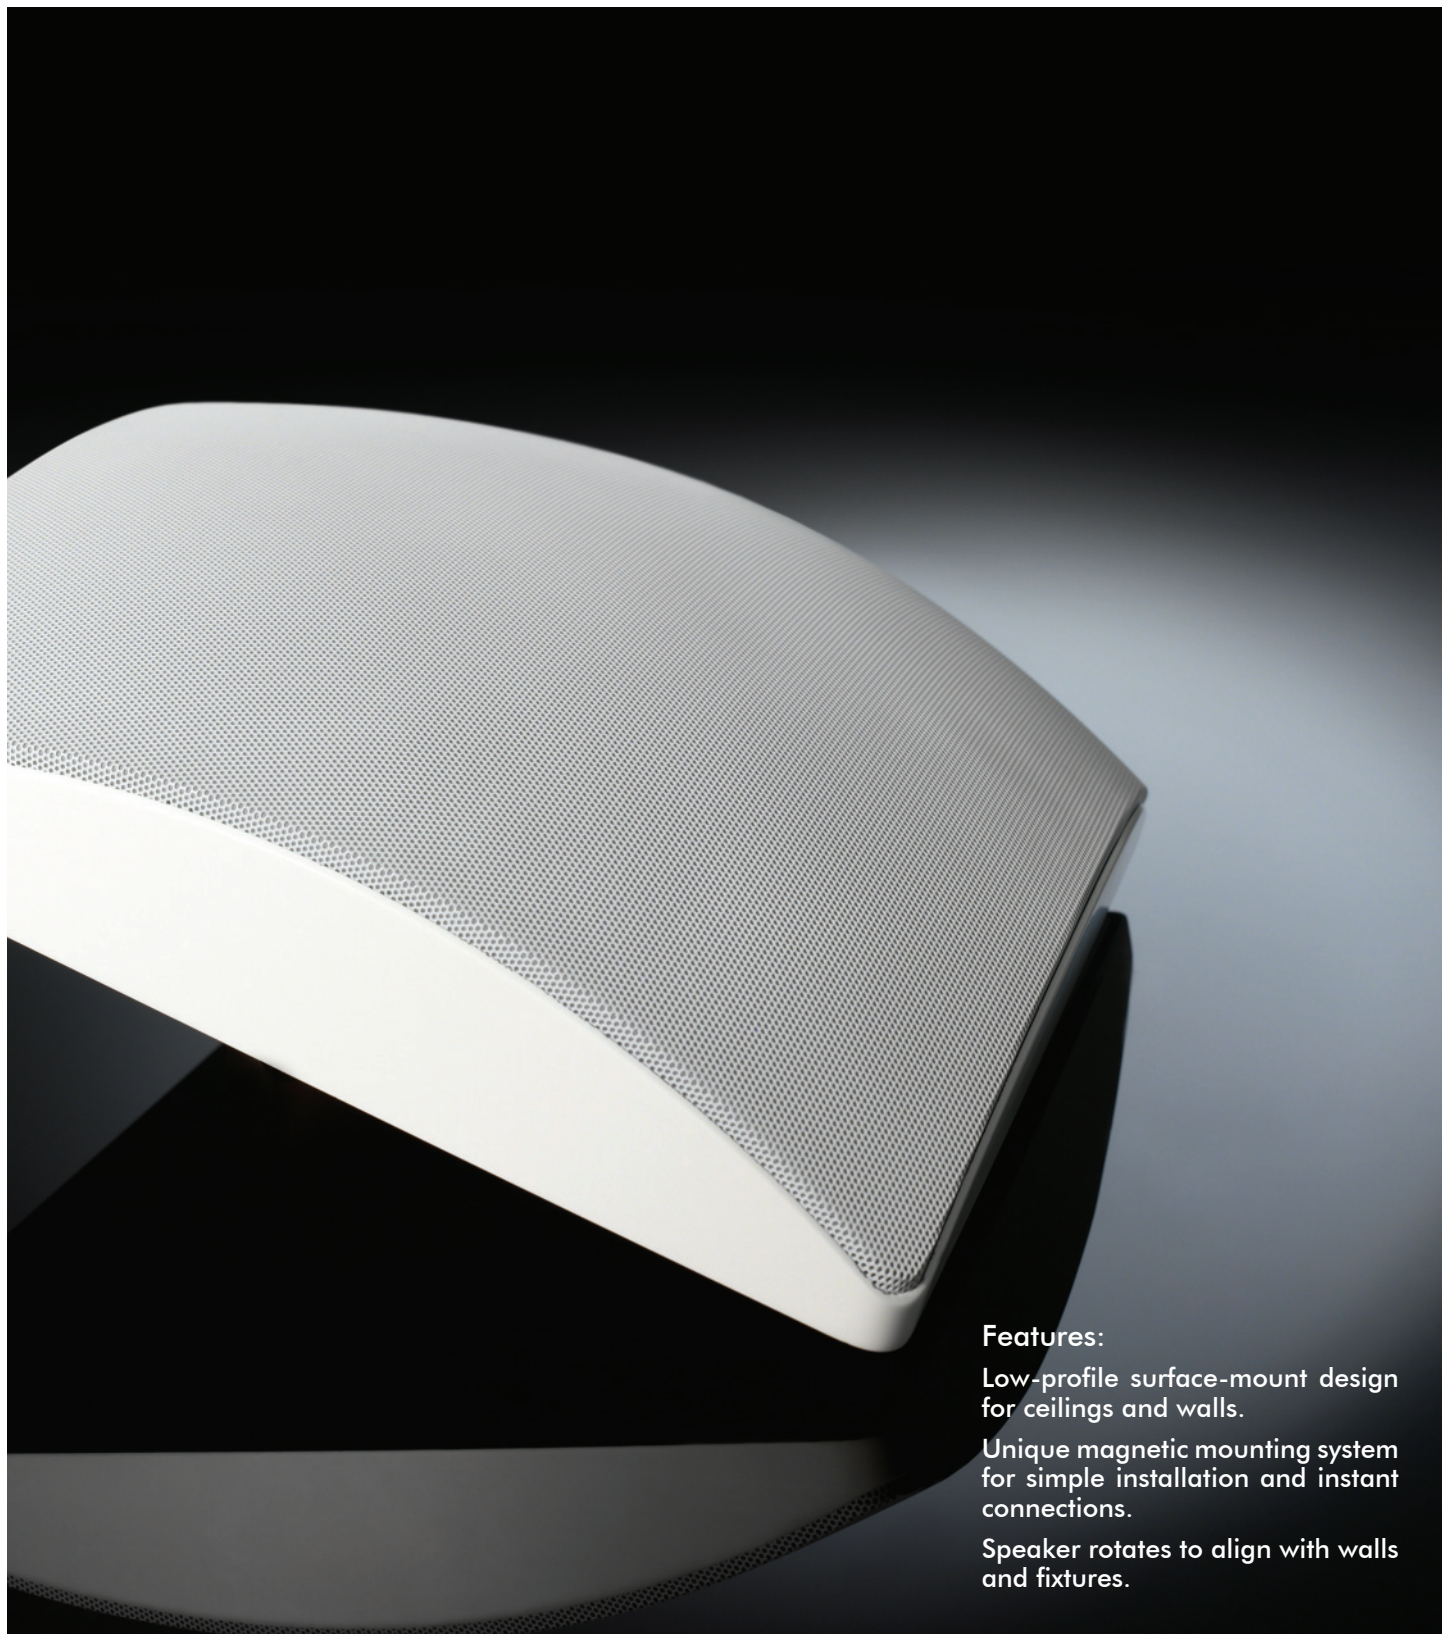

**Features:**

Low-profile surface-mount design for ceilings and walls.

Unique magnetic mounting system for simple installation and instant connections.

Speaker rotates to align with walls and fixtures.

# SURFACE-MOUNT SERIES


## SM55 AND SM55 SST




The new Sonance **SM55** and **SM55 SST** Surface Mount Speakers are the perfect solution for those who demand quality sound but cannot use in-ceiling or in-wall speakers. In the **SM55** and **SM55 SST**, Sonance engineers have created speakers that sound great, yet are decor-friendly, easy to install, and do not require a mounting hole. A one-step paint process saves time compared to traditional flanged speakers.

The low-profile surface-mount design is ideal for installations that cannot accommodate in-ceiling or in-wall speakers. Installation is extremely simple: Connect the mounting plate to the speaker wire and screw it to a junction box in the mounting location. The mounting plate rotates, allowing the **SM55** and **SM55 SST** to be aligned with lighting fixtures or other decor features after installation. For installations without a junction box, the speaker can be attached directly to the mounting surface without using the mounting plate.

### Dimensions:

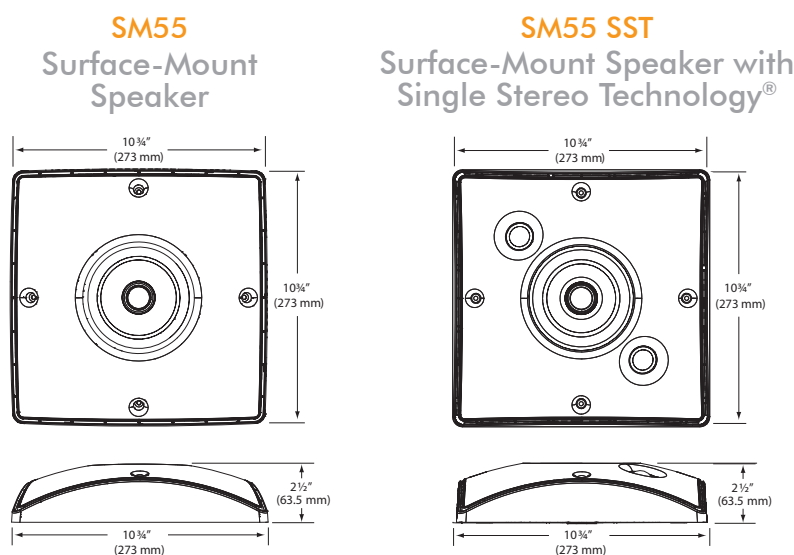

### Installation Example:

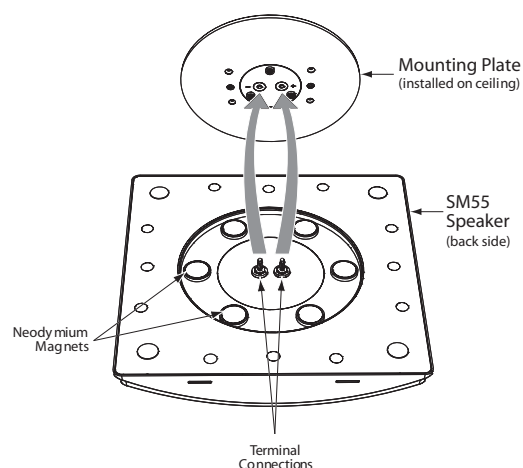

### Specifications:

#### SM55

<b>Tweeter:</b>	1" (25mm) silk dome, ferrofluid-cooled
<b>Woofer:</b>	5 1/4" (133mm) carbon fiber cone, with a rubber surround
<b>Frequency Response:</b>	65Hz – 20kHz $\pm$ 3dB
<b>Impedance:</b>	8 ohms nominal; 6 ohms minimum
<b>Power Handling:</b>	5 watts minimum; 60 watts maximum
<b>Sensitivity:</b>	88dB SPL (2.83V/1 meter)
<b>Grille Material:</b>	Perforated aluminum
<b>Dimensions (W x H x D):</b>	10 3/4" x 10 3/4" x 2 1/2" (273mm x 273mm x 63.5mm)
<b>Shipping Weight:</b>	10 lbs (4.5kg) pair

#### Limited Lifetime Warranty:

For full warranty information, please see the instruction manual.

#### SM55 SST

<b>Tweeter:</b>	Two 1" (25mm) silk domes, ferrofluid-cooled
<b>Woofer:</b>	5 1/4" (133mm) carbon fiber cone, with a rubber surround, dual voice coil
<b>Frequency Response:</b>	65Hz – 20kHz $\pm$ 3dB
<b>Impedance:</b>	8 ohms nominal; 6 ohms minimum
<b>Power Handling:</b>	5 watts minimum; 60 watts maximum
<b>Sensitivity:</b>	88dB SPL (2.83V/1 meter)
<b>Grille Material:</b>	Perforated aluminum
<b>Dimensions (W x H x D):</b>	10 3/4" x 10 3/4" x 2 1/2" (273mm x 273mm x 63.5mm)
<b>Shipping Weight:</b>	5 lbs (2.3kg) each

Sonance  
212 Avenida Fabricante  
San Clemente, CA 92672-7531 USA  
800.582.7777  
sonance.com